



D.C. Power Engineering
9337 Douglas Dr.
Riverside, CA 92503
951-509-5617


Alternator Harness Installation Guide

If you're using a Dummy Light (Alternator Lamp) on the dash simply splice the Yellow wire to the lamp and that will supply the 12volts ignition to the wire to power the alternator.



The blue wire will have a ring terminal, simply connect the ring terminal to the Positive Output Stud of the alternator like shown below.

If you are not running a Dummy Light (Alternator Lamp) on the dash, you will have to put a 500ohm 1/2watt resistor inline on the Yellow wire to 12volts key on/key off as shown below.

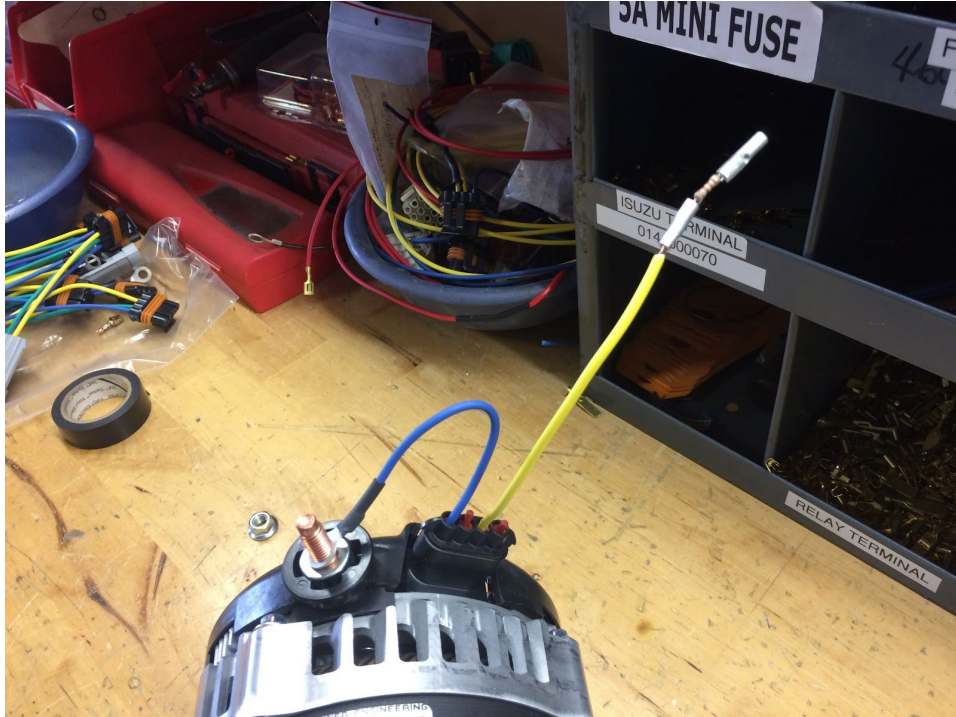

If you have any questions please contact us at (951) 509-5617.